


Computer / es(:

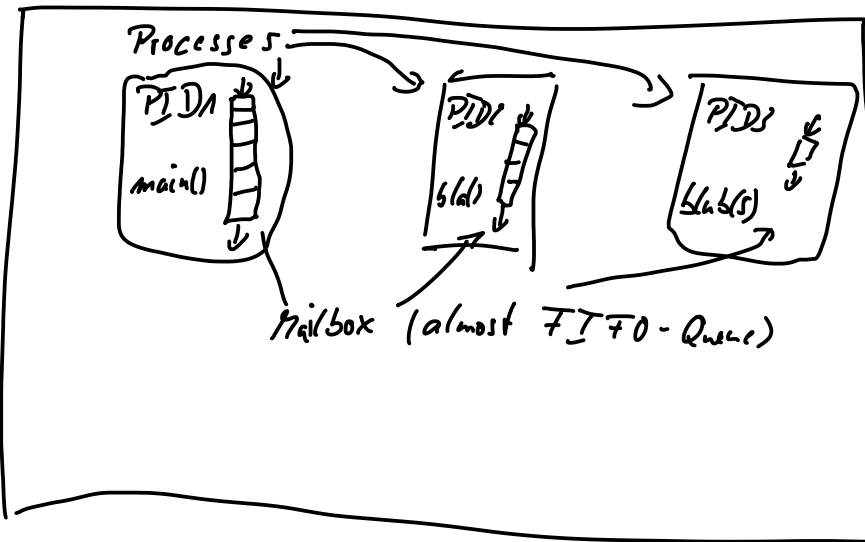

Access to own PID:
self()


Send a message to process
pid!value

Mailbox can only be read by its own process.

receive
pat₁ → e₁;

⋮
pat_m → e_m
[after time → e] - optional
end

Server to store key-value-pairs

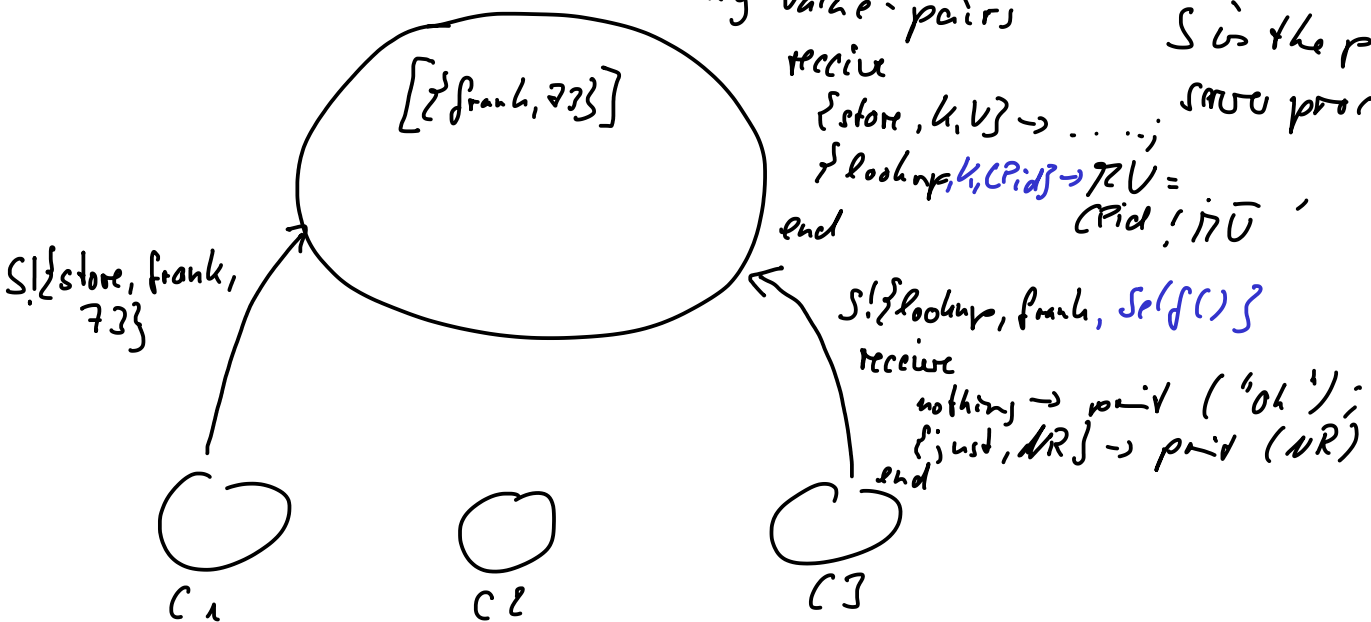

S is the pid of the
same process

receive
{ store, k, v } → ...;
{ lookup, k, CPid } → ZV =
CPid! ZV
end

receive
nothing → print ("ok");
{ just, NR } → print (NR)
end