

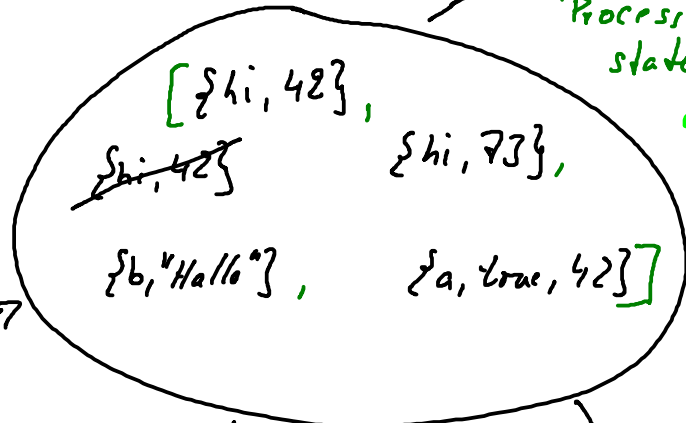


Implementation in Erlang


Linda-Server / Tuple-Space
Process with list of tuples as
state and a list of suspended
client request (in/r.d).

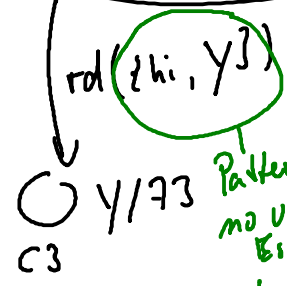

Semantics:
If matching value
is in the tuple
space, remove it
and continue.
Otherwise suspend.

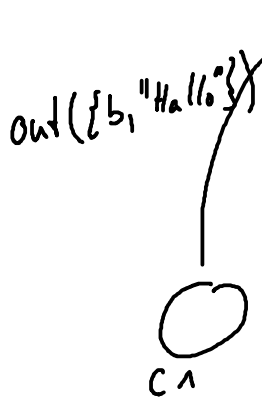

Patterns are
no values in
Erlang.

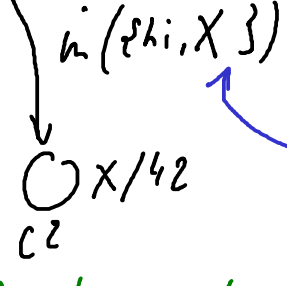

Pattern

Use a function instead!
e.g. fun ({hi, Y}) -> Y end
fun (X) -> {hi, Y} = X, X end